




SERIES G SWITCH

- ◇ Hermetically Sealed Contacts
- ◇ Low Contact Resistance
- ◇ Life Expectancy in the Millions
 - ◇ Momentary Action
 - ◇ Low Bounce Characteristics
- ◇ Terminals weldable and solderable
- ◇ Ideal for Dry Circuits or Higher Current Applications

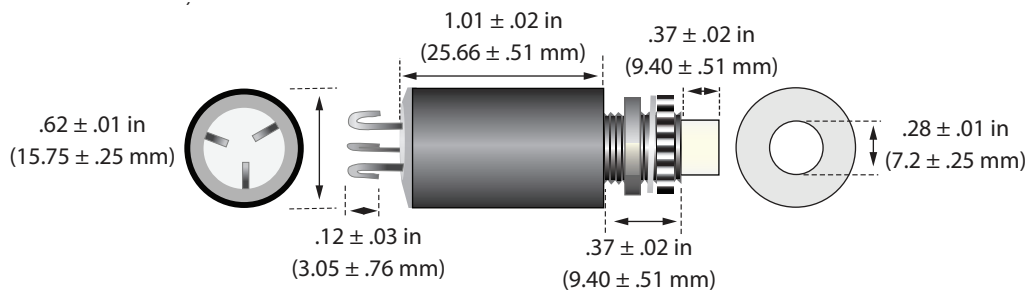

Maximum Ratings					Poles and Throws	Circuit		Part Number		Pre-Travel	Differential Travel	Over Travel
Amps	A.C.		D.C.			Contacts	Form	Pushbutton Operating Pressure				
	Volts	Volt Amps Resistive	Volts	Watts Resistive				8 oz.	17 grams			
.5	125	12	125	10	SPST	NO	A	GC-HA	GC-FA	.08 min. (12.03)	.04 max. (1.2)	.125 max. (3.17)
.5	125	12	125	10	SPST	NC	B	GC-HB	GC-FB			
.5	125	12	125	10	DPST	NO	A	GC-HA2	GC-FA2			
.5	125	12	125	10	DPST	NC	B	GC-HB2	GC-FB2			
.5	125	12	125	10	3PST	NO	A	GC-HA3	GC-FA3			
.5	125	12	125	10	3PST	NC	B	GC-HB3	GC-FB3			
.5	125	12	125	10	4PST	NO	A	GC-HA4	GC-FA4			
.5	125	12	125	10	4PST	NC	B	GC-HB4	GC-FB4			
.250	125	4	28	3	SPDT	NO-NC	C	GB-HC	GB-FC			
.250	125	4	28	3	DPDT	NO-NC	C	GB-HC2	GB-FC2			

GEORGE RISK INDUSTRIES, INC.
 802 S. Elm St.
 KIMBALL, NE 69145



Made in U.S.A.

TOLL-FREE 1-800-445-5218
TOLL-FREE 1-800-523-1227
(308) 235-4645
FAX (308) 235-2609
E-MAIL: dougb@grisk.com

WWW.GRISK.COM