




# SERIES D SWITCH

- ◇ Hermetically Sealed Contacts
- ◇ Low Contact Resistance
- ◇ Life Expectancy in the Millions
  - ◇ Momentary Action
  - ◇ Low Bounce Characteristics
- ◇ Terminals weldable and solderable
- ◇ Ideal for Dry Circuits or Higher Current Applications

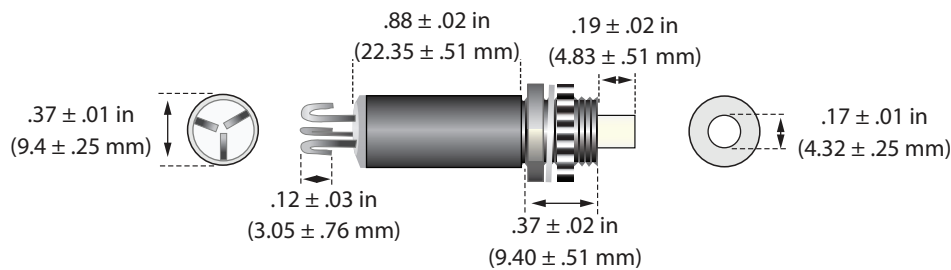

Maximum Ratings					Poles and Throws	Circuit			Part Number		Pre-Travel	Differential Travel	Over Travel
Amps	A.C.		D.C.			Contacts	Form	Pushbutton Operating Pressure					
	Volts	Volt Amps Resistive	Volts	Watts Resistive				8 oz.	17 grams				
.5	125	12	125	10	SPST	NO	A	DC-HA	DC-FA	.062 min. (1.57)	.031 max. (1.79)	.125 max. (3.17)	
.5	125	12	125	10	SPST	NC	B	DC-HB	DC-FB				
.250	125	4	125	3	SPDT	NO-NC	C	DB-HC	DB-FC				

**GEORGE RISK INDUSTRIES, INC.**  
 802 S. Elm St.  
 KIMBALL, NE 69145

[WWW.GRISK.COM](http://WWW.GRISK.COM)



**TOLL-FREE 1-800-445-5218**  
**TOLL-FREE 1-800-523-1227**  
**(308) 235-4645**  
**FAX (308) 235-2609**  
**E-MAIL: [sharonw@grisk.com](mailto:sharonw@grisk.com)**