




SERIES R SWITCH

- ◇ Hermetically Sealed Contacts
- ◇ Low Contact Resistance
- ◇ Life Expectancy in the Millions
 - ◇ Momentary Action
 - ◇ Low Bounce Characteristics
- ◇ Terminals weldable and solderable
- ◇ Ideal for Dry Circuits or Higher Current Applications

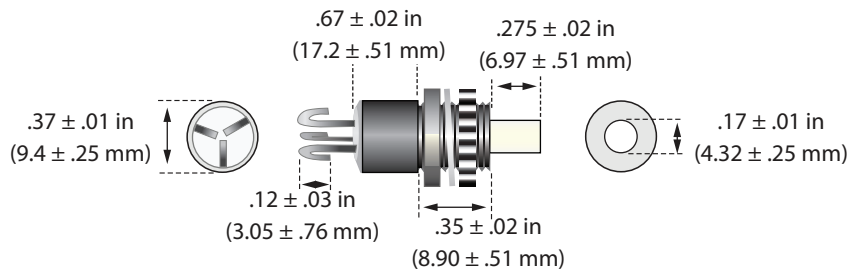

Maximum Ratings					Poles and Throws	Circuit		Part Number	Pre-Travel	Differential Travel	Over Travel
Amps	A.C.		D.C.			Contacts	Form	8 OZ. Pushbutton Operating Pressure			
	Volts	Volt Amps Resistive	Volts	Watts Resistive							
.250	150	12	150	4	SPST	NO	A	RB-HA	.062 min. (1.57)	.031 max. (1.79)	.125 max. (3.17)
.250	150	12	150	4	SPST	NC	B	RB-HB			
.250	150	4	28	3	SPDT	NO-NC	C	RB-HC			

GEORGE RISK INDUSTRIES, INC.
 802 S. Elm St.
 KIMBALL, NE 69145



Made in U.S.A.

TOLL-FREE 1-800-445-5218
TOLL-FREE 1-800-523-1227
(308) 235-4645
FAX (308) 235-2609
E-MAIL: sharonw@grisk.com

WWW.GRISK.COM